

DB 1 TELEDEX

OPERATION MENU

FEATURES


1. Telephone numbers (with second telephone or fax number)
2. Appointments
3. LCD clock (12 and 24 hour time)
4. Calendar (month, date and day)
5. Daily alarm
6. Calculator

KEYS AND FUNCTIONS

- ON/OFF key**
To switch unit on or off.
- APPOINTMENT key**
To enter and delete appointment alarm time.
- TEL/FAX key**
To switch between telephone and fax.
- INPUT key**
To enter names and telephone numbers.
- DAY key**
To Select appointment day.
- STORE key**
To Store telephone numbers.
- SET key**
To store appointment details (these will automatically be deleted the day after the appointment).
- CL/AL key**
To switch between clock and alarm time.
- CAL key**
Calculator function.
- ◀▶ key**
To scroll through names.
- A - Z keys**
To select respective alphabet.
- = key**
To scroll through telephone or fax number, to change AM/PM, and also minus function in calculation.
- X key**
Multiplication in calculation, and change 12/24 hour in clock mode.
- SPACE key**
To set a space between names or telephone numbers, and also square root '√' in calculation.

LCD DISPLAY

1. 11 character dot matrix display
2. 11 digit numerical display
3. Daily alarm indicator
4. Telephone indicator
5. Fax number indicator
6. Appointment day
7. Appointment time
8. Stored telephone numbers
9. Contents indicator (forwards)
10. Contents indicator (backwards)

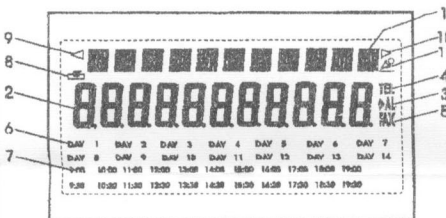

STARTING UP

1. Insert the battery on the top of the unit with the polarity as indicated.
2. Press ON/OFF to switch on the display.
3. If the display shows random information, reset by pushing a pin into the RESET hole at the back.

SETTING CLOCK AND CALENDAR

1. Press SET; the first digit of hour will then flash.

Enter 0712 to set the clock to 7:12a.m.

To set p.m. time, press AM/PM once.

2. After the time has been set the first digit of the date will flash. Enter 0527 to set the date to 27 May. Then enter 0 to set Sunday (Sunday =0, Monday =1, Tuesday =2, etc.).

SETTING DAILY ALARM

1. Press CL/AL (clock/ alarm selector). The alarm time will be displayed with the first digit flashing. Enter 0800 to set the alarm at 8:00 a.m. (To set the alarm at 8:00p.m. press AM/PM, then enter 0800).
2. Press AL ON/OFF to set the alarm on or off. (AL will be displayed when the alarm is set).
3. After 10 seconds Time/Calendar will be displayed again.

SETTING APPOINTMENTS

1. To set an appointment for the next day, Press DAY once, Day 2 will be displayed. Enter 12:00; 12:00 will then flash. Press INPUT once, enter the person's name by moving the Index Selector to the respective alphabet, then press the Index Selector Button on the Index Selector.
2. Press TEL/FAX and enter the telephone number using the numbers on the keyboard. If a second telephone or fax number is to be entered, press TEL/FAX again and enter the number required. Then press STORE; the display will stop flashing and information will be stored. Press CL/AL to return to Time/Calendar.
3. Any information not stored will be deleted after appointment time has expired. If the information is to be stored, press STORE.
4. If only the alarm time is to be stored, enter appointment time and press SET.
5. At the appointment time details of the appointment will flash and a signal will be heard. To stop signal press TEL/FAX once.
6. To cancel an appointment, press the respective appointment time key. The appointment time will then flash. Press C/CE.
7. To cancel all the day appointments, press STORE; the day indicator will then flash. Press C/CE; all the day appointments will then disappear.
8. To check appointment details, press the respective appointment time. Press CL/AL to return to Time/Calendar.
9. To enter an appointment with a person whose name and telephone number have already been stored, press appointment time and locate the name by pressing the Index selector. When the name is found, press STORE to store. Press CL/AL to return to Time/Calendar.

NAME AND TELEPHONE NUMBERS


1. To enter a name and telephone number, press INPUT; the display will then flash. Enter the name by using the Index selector as described in setting appointments.
2. Press TEL/FAX; the first digit of the number display will then flash. Enter the telephone number by using the number keys. If a second telephone or fax number is to be entered, press TEL/FAX and enter the number. Press STORE; the display will stop flashing and the number will be stored.
3. Press CL/AL to return to Time/Calendar.
4. To cancel a telephone number, press the respective alphabet key; the telephone number will then display. Press C/CE twice to delete.
5. To check telephone details, press the respective alphabet. Press CL/AL to return to Time/Calendar.
6. To edit a telephone, by pressing (▶) key to start editing name; press TEL/FAX to edit telephone; press TEL/FAX again to edit the Fax number. Press STORE to finish editing.

DIAL A TELEPHONE

1. Find the telephone number at the telephone list, then place the mouthpiece of telephone handset to the speaker at the TELEDEX and press DIAL key. After hear all the digit had been dialed then the dialing completed. Note: When insert a '-' between digits will perform a 3.5 second pause. When insert a 'SPACE' between digits will perform a pause which need to press DIAL to continue the dialing.

BATTERY REPLACEMENT

If nothing is displayed when the unit is switched on, or the display becomes faint, replace the battery with 2 pieces of G13 batteries.

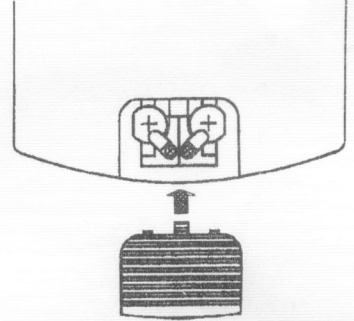

NOTE: In order to retain the unit's memories, please turn off the unit and replace the batteries within 1 minute.

DB 1

英