

SIEMENS




IC 35 User Guide

English






Controls

Important key functions:

-  Activate/IC menu (see page 39).
-  Deactivate.
-  Cancel, exit the current menu.









Direct main menu activation with:

 +  to 

Cursor keys

Calculator functions



- | | |
|--|---|
|  Activate menu. |  Confirm input. |
|  Use to speed dial functions. |  Delete the character to the left of the cursor. |
|  Enter special characters. |  Shift lock key to enter uppercase letters. |
|  Space/mark. |  Enter German umlauts. |

For additional keys and special functions, see page 39

Info bar

Current information is shown in a bar on right-hand side of the screen:



- ONLINE:** Connection to mobile phone/PC active.
- MESSAGE:** E-mail or SMS received.
- TASK:** Active entry in "To Do List".
- ALARM:** Alarm reached in the schedule calendar.
- BATTERY:** Renew batteries.
- CAPS:** All letters written in upper case.

Precautions

Please observe the following:



Avoid pointing active infrared port at eyes.



Never dismantle IC35.



Use only specified batteries. Other batteries can damage the unit (see page 5).



Used batteries should be disposed of in accordance with the relevant legislation.



The MMCards can be removed. Do not leave them lying around: there is always the danger of small objects being swallowed by young children.



Use only Siemens ORIGINAL accessories to avoid the risk of possible damage.

Introduction

Thank you for choosing a Siemens product.

Please read this user guide carefully to ensure safe and effective use of your unit.

This user guide provides an overview of all functions and features of IC35.

Further information and tips can be found at:

<http://www.siemens.com/ic35>

Siemens wish you every success and lots of enjoyment with IC35.

Symbols used in the user guide



Use cursor keys



Press the menu key



Press keys **simultaneously**



Function in a menu




Symbol next to marked options

Contents

Controls	3	Display	27
Getting started	5	Converter	28
Inserting the batteries	5	Setting the currency unit	28
Inserting the cards	6	Corrections	28
Activating	8	Changing the rate/currency	28
Address Book	9	Viewing the exchange rate list	28
Creating a new entry	9	File Menu	29
Displaying an entry	10	Opening	29
Editing an entry	11	File Manager	29
Deleting entries	11	Installing from an MMCARD	31
Editing the category	11	Deinstalling the application	31
Tools	12	Defragmentation	31
Loading a phonebook	13	Data exchange	32
Schedule	14	IC35 Sync	32
Moving within the calendar	14	Phone Manager	33
New schedule entry	14	W@p-Browser	34
Editing entries	15	Setup	35
To Do List	17	Alarm Tone	35
New entry	17	FN9 Setting	35
Editing entries	18	Item Protection	35
Editing a category	18	Language	35
Displaying entries	18	Miscellaneous	35
Additional menu functions	19	Password	36
Messaging	20	Phone Select	36
Setup	20	Power Down Time	36
Setting up SMS	20	Power On Procedure	37
Creating a new message	23	Startup	37
Message list	24	Time & Date	37
Messaging menu	24	Info	38
Note Pad	25	Special functions	39
Creating a new entry	25	IC key	39
Editing entries	25	Function keys	39
World Clock	26	IC menu	39
Time & date	26	Unit data / maintenance /	
Local	26	accessories	40
Destination	26	Technical data	40
Calculator	27	Maintenance tips	40
Operators	27	Hotline	41
Memory	27	Index	43

Inserting the batteries

The unit requires two 1.5 volt batteries or two 1.2 volt NiMH batteries (see "Miscellaneous", page 35) with the highest capacity possible (MICRO LR03 AAA). Open the battery compartment as indicated in the diagram **1**. When inserting the batteries, ensure that the poles are facing in the right direction (+, -).

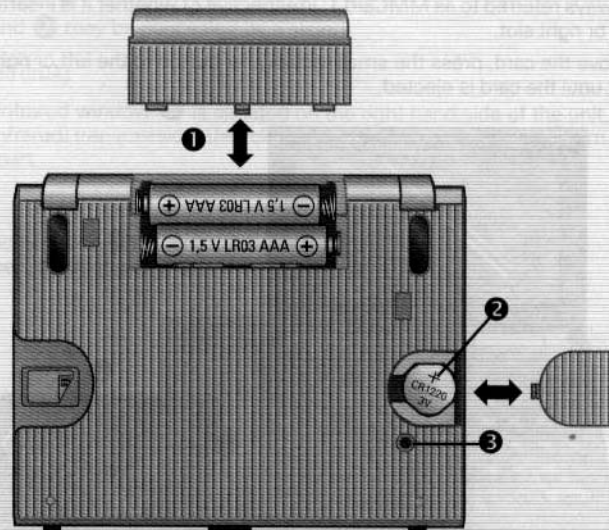

Data is preserved by a 3-volt button cell (CR 12 20) when the batteries are being changed **2**.

To replace the button cell, open the compartment as indicated in the diagram. When inserting the cell, ensure that the poles are facing in the right direction.

Press the Reset key **3** by inserting a thin pointed object (ballpoint pen) into the small opening. Three options appear on the screen (reset to default values):


- Reset, but do not delete any data
- Reset and delete all data
- Reset, delete all data and all applications loaded.

Inserting the cards

The unit can accept two MMCards (MultiMediaCard™) and one chip card (smart card). The MMCards extend the unit's memory with capacities starting with 4 MB.

As indicated in the diagram ①, insert the MMCard into one of the slots provided on the front of the unit until it clicks into place. The first MMCard inserted is always referred to as MMCard 1, irrespective of whether it is inserted in the left or right slot.

To remove the card, press the small rectangular button to the left or right of the slot until the card is ejected.

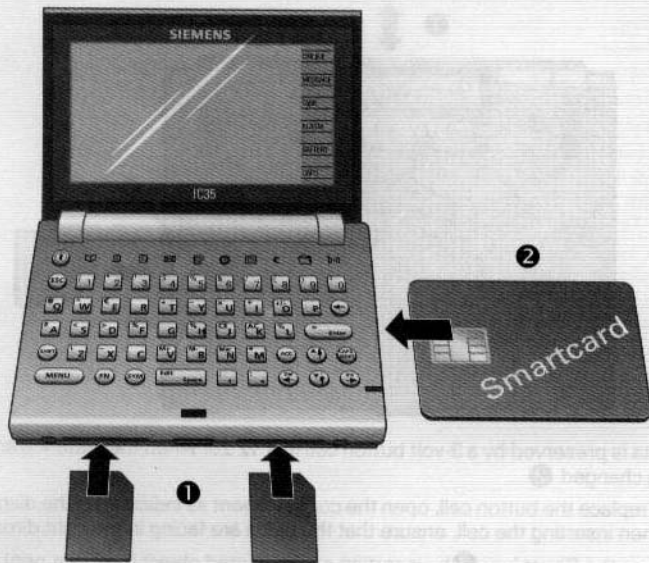

The chip card ② is inserted in the base of the unit until it clicks into place. The gold contact must face upwards.

Other elements

Setting the contrast/PC interface/telephone interface

On the left of the unit there is


- a thumbwheel ① for adjusting the contrast of the screen
- the port ② for PC and telephone connection (① and ② may be concealed by a slider).

Infrared (IrDA)

The infrared window ③ is situated on the right-hand side of the unit. For IrDA (infrared) transmission, the relevant units should be between 5 cm and 35 cm apart.

Lock

The screen lock ④ is centred on the front of the unit. To open, press the lock and raise the cover.

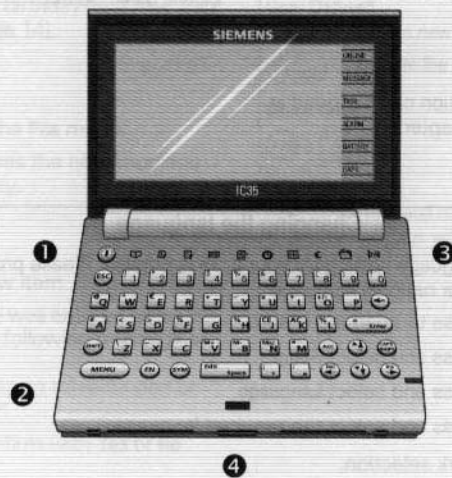









Activating

Opening the unit activates it. The function groups appear on the screen.

01/03/2000
09:33

Information and
Communications

-  **Addresses**  **Note Pad**
-  **Schedule**  **World Clock**
-  **To Do List**  **Calculator**
-  **Messaging**  **Converter**

Use the cursor keys to select the required function area:



And confirm your selection with:



Further information can be found in the following chapters.


Ticker line

The ticker line under the screen can show the contents of unread short messages (SMS) or other information.

If the length of a short message exceeds the ticker line, the screen will scroll from right to left in order to display all the contents.

Important inputs







Before using IC35 for the first time, you should first set the time and date (see page 26) and enter your personal address information (business card):

 In the **File** menu.

Eigene Daten Select.



Changing the language

The default language setting for your IC35 is English. Please proceed as follows to set your national language:


-  Press to open the menu.
-  Press and select **Setup**.
-  Press and select **Language**.
-  Press and select the required language.
-  Mark selection.
-  Save and return to the main menu.



Select **Address Book**.

(also possible:  + )

Creating a new entry

 Pull down the **File** menu.


New Select. Creates a new entry.




Move the cursor to locate the field you want and enter your data.

Please note in the case of the **Birthday** field:




or  or enter number

The calendar is displayed.

 Press and select the birthday date (see also page 14).

Saving

 In the **File** menu:

Save Saves the new/modified entry.


Or

Save as (new)


Save as a new item.

If the birthday was entered using the calendar, the following message also appears:

"Would you like to be reminded of this birthday?"

 Confirm with **Yes** or **No**.

Notes on input masks

 Press to jump to the next field after making an entry.

- If the space for a field is full, the cursor stops moving.
- If the length of a message exceeds the display area of the screen, the line will be scrolled horizontally.
- You cannot save a new entry unless you have entered either the first or the last name at least.
- The entry in the "Notes" field is limited to 255 characters.

Customising a field name

If the cursor is positioned on the (def) field:

 In the **Tools** menu:



User Defined

Enter a new name for the field.



Confirm the new name.

Quick Save

 +  Press

Or



Press and confirm the ensuing message with **Yes**.

Displaying an entry



Select **Address Book**.



The address index list is displayed.



Select **Address**.



The address entry is displayed.

If you want to move to the next or previous entry:



Pull down the **File** menu.

Select **Previous** or **Next**.

Searching for an entry

Searching by sequence



You can press the cursor keys to search the list in alphabetical order for a particular address entry.

Using the search box

The search box is located below the list. You can enter the initial letters of the word here for a direct search.

The cursor bar scrolls through the list as you are making your entry. The input is ignored if there is no match for your entry.

Searching by keyword

You can find any information in an address entry by entering a keyword.



Pull down the **File** menu.

Find

Select.

Enter a keyword or part of a search string in the search box.



Confirm to search. A list containing the matches appears.



Use keys to move the cursor to the entry you want in the case of multiple matches.



The address entry is displayed.

Sorting entries



Pull down the **Category** menu.

Select a category name to display the address entries it contains.

Editing an entry

First of all, select an address entry from the list and open it.

Use the menu functions to copy, cut and paste text.



Move the cursor and insert it before the letter you want to mark.



Pull down the **Edit** menu.

Mark

Select.



Mark the text.



Pull down the **Edit** menu and select:

- **Cut** to cut marked data to memory.
- **Copy** to copy marked data to memory.



Position the cursor in a field.



Pull down the **Edit** menu.

Paste

The marked data is inserted.

Changing a category name



Pull down the **Category** menu and select the category you want.



In the **File** menu:

Save

Saves the new/changed entry.

Deleting entries

First of all, select the address entry you want in the list or



mark the entry/entries (✓ next to the line).



Pull down the **File** menu.

Delete

Select.



Delete the entries.

Editing the category

You can group address entries into different categories:

- **All** is a collective category for all the address entries.
- **Unfiled** is the default category for a new entry.
- **Personal** is for your private address information.
- **Business** is for your business and work address information.
- **Create category** (name with max. 8 characters)

Creating a new category



Pull down the **Category** menu.

Create Category



Select and enter the name you want.



Confirm.

Entries can now be assigned to the new category.


Removing a user-defined category

You can only delete user-defined categories along with their contents (address information) with the File Manager. (For more information on the File Manager, see page 29).


Communication

You can transfer a phone number from the address index list to your phone and dial it immediately or send an SMS/e-mail.

Select an address entry.

 Pull down the **Communication** menu.


Call Select and, where applicable, select one of the three possible phone numbers.

 The phone number is transferred to the telephone and dialed.

- The correct telephone must be set with the **Phone Select** function in the **Setup** menu (see page 36).
- Ensure that the telephone has an infrared port or is connected via a cable.
- For IrDA (infrared) transmission, the units should be between 5 cm and 35 cm apart. The IrDA windows must face each other and be within line of sight.

or

SMS/EmailSelect and enter the text.

 Open the **File** menu.

Select Select or

Save the draft.

IrDA

You can send or receive address information (business cards in accordance with the V card standard) from another IC35 or compatible terminal (telephone, organizer).

Transmitting business cards



Move to the entry you want in the list or



mark the entry/entries (✓ next to the line).



Pull down the **IrDA** menu and select the function you want:

My Business Card (see also page 8)

Send Business Card

Receive Business Card




The transmission is started.

Tools


You can upload and download address information from a telephone or another compatible terminal.

Connect with the mobile phone (see page 7).


Loading a phonebook

 Pull down the **Tools** menu and select **Download phonebook**.


Assign a name to the folder (max. 8 characters). You can confirm the prompt message "Do you want to download phonebook with the first part as your first name?" with **Yes** or **No**.

 Start to read or write the address information between the smart card and Address Book.


Uploading the phonebook

 Pull down the **Tools** menu and select **Upload phonebook**. Address information is copied to the telephone.

Copying from the Red Phonebook


 Pull down the **Tools** menu and select **Copy from the Red Phonebook**.

Create a new folder for the entries (see "Telefonbuch herunterladen").

 The phonebook is loaded.

Copying to the Red Phonebook


Select the address(es) you want.


 Pull down the **Tools** menu and select **Copy to Red Phonebook**.

Copying from and to SIM cards

By placing a large smart card in the IC35 card slot (see page 6), you can copy address information from the Address Book to the card (and vice versa).

1. Insert a smart card.


 Pull down the **Tools** menu and select **Copy from SIM** or **Copy to SIM**.

 The phonebook is transferred.

- Identical address records will be overwritten during loading and copying.
- When writing to a smart card, address records with three phone numbers will split into three records with the same name.
- A prompt message **SIM full** appears during the writing process if there is no free SIM memory.

Birthday list

If you have entered birthdays in the Address Book, you can output these in a separate list.

 Pull down the **Tools** menu and select **Birthday List**.

The list of birthdays and corresponding ages is displayed.

1

Select Schedule.

(also possible: FN + [2])

You will see a calendar with the current date highlighted. A dot at the bottom left of a date indicates that at least one schedule has been saved for this day.

Moving within the calendar

FN + Del or Ins

Change to the previous/next **year**.

FN + ↑ or ↓

Change to the previous/next **month**.

↑ ↓ Del Ins

Select a **day** with the cursor

or

Edit Space

press and enter the date directly.

Daily schedule

If the date is selected in the monthly schedule:

Enter

Open the daily schedule screen.

(ESC) Cancel and return to original position.

New schedule entry

The daily schedule screen is open.

↑ ↓

Move to the time you want.

Enter

Open the input window and make an entry.

Subject

Name of the schedule.

Start

The time can be customised, the calendar opens when the cursor is placed on the date.

Date

See above.

Repeat

Ins

Select the required repeat frequency and set.

Alarm

Del / Ins

Select the setting.

LED

Flash alarm on/off

Buzzer

Buzzer on/off

Notes

Information about the entry (max. 255 characters).

Saving an entry

MENU

In the File menu:

Save

Saves the new/modified entry

(also possible: FN + [S]) or

Save as (new)

Saves the entries as a new entry.

You can jump to the first or the last schedule entry in the input window.

MENU

Pull down the File menu and select **Next** or **Previous**

Editing entries

The daily schedule screen is open.

ESC

You can cancel and jump back to the original menu at any time.

Edit an entry

↑ ↓

Use the cursor to select an existing entry.

Enter

Open the entry.

Or

MENU

Pull down the File menu and select **Open**.

Searching by keyword

MENU

Pull down the File menu.

File

Select.

Enter a keyword or parts of a search string in the search window.

Enter

Confirm to search. A list of matches appears.

↑ ↓

Select the entry you want in the case of multiple matches.

Enter

The schedule entry is displayed.

Deleting entries

↑ ↓

Use the cursor to select an entry.

Edit Space

Mark the highlighted entry (✓ next to the line).

Where applicable, repeat with other entries, then

MENU

pull down the File menu and select **Delete**.

Enter

All marked entries are deleted.

You can also use the appropriate menu functions, e.g. **Select All** to mark an entry.

Sending/receiving schedules

The compatible terminal must be connected via the infrared interface or a cable (see page 7).



Mark the entry you want in the list (✓ next to the line).



Pull down the **Communication** menu and select the function you want.



The transmission is started in accordance with the V Calendar standard

Further menu functions



Select **Schedule**.



Press menu and select:

Function

Schedule

The schedule index for the date currently selected opens.

To Do List

If an entry is recorded in the To Do List, it is displayed. Otherwise, you can enter a new entry.

Day Scan

The Schedule index and the To Do List for the date currently selected are displayed.

Tools

Select Date

You can manually enter the date you want to select.

Today

The cursor jumps to today's date in the calendar.

Delete

You can delete all old entries preceding the current date.



Select **To Do List**.

(also possible: $\text{FN} + \text{3}$)

You can record your personal and business tasks as **To Do** items and add them to the To Do index by their titles. You can enter other details: a time period, execution priority, completion status, and notes for each To Do item.

New entry

If the To Do List is empty, a prompt message "Do you want to add a new entry?" appears.



Confirm **Yes** to create a new entry.

Or



Pull down the **File** menu and select **New**. The input window opens.



Use the cursor to move from field to field.

Subject

Entry name

Start

Start the task.



Opens the calendar for selecting the start date.

Date

End the task.



Opens the calendar for selecting the start date.

Priority

Selection of:



Normal, High (+), Low (-)

Complete



Select **Yes/No**.

Note

Information about the entry (max. 255 characters).

Saving an entry



In the **File** menu:

Save

Saves the new/modified entry.

(Also possible: $\text{FN} + \text{S}$)
or

Save as (new)

Saves the inputs as a new entry.

Next/previous entry

When editing an entry, you can jump to the previous or next entry.




Pull down the **File** menu and select **Next** or **Previous**.

Note:


- When saving the entry, you must be sure that the **Start** is not later than the **End** time for the task. Otherwise, a prompt message **The start time must be earlier than the end time** will appear.


Editing entries

If tasks are recorded in the To Do List, their title is displayed. The current category is indicated in the upper right-hand corner.


 You can cancel and jump back to the original menu at any time.

Displaying entries

 Move to the entry you want.

 Open the input window and display the entry.

Or

 Pull down the File menu and select Open

Modifying entries

For more information, see page 15.

Deleting entries

For more information, see page 15.


Searching for entries


For more information, see page 15

Changing category names

For more information, see **Changing a category name** on page 11.

Marking an entry as "Completed"

 Move to the entry required.

 Pull down the Tools menu and select **Complete**.

Editing a category



You can group address entries into different categories:

- **All** is a collective category for all the address entries.
- **Unfiled** is the default category for a new entry.
- **Personal** is for your private address information.
- **Business** is for your business and work address information.
- **Create category**
See also "Creating a new category", page 11.



Displaying entries

The following features can appear for entries in the list:

Priority

-  Task has top priority.
- blank Task has no assigned priority.
-  Task has low priority.

Completion status

- blank Task is unfinished.
-  Task is overdue.
-  Task is completed.

Additional menu functions



Select **To Do List**.



Press menu and select:

Category

The display can be restricted to individual categories.

Filter

All

All entries are displayed.

Active

Only active entries are displayed.

Complete

All completed tasks are displayed.

Tools

Sort by date


The display is sorted by date.

Sort by priority

The display appears in the sequence:

High - Normal - Low

Complete

The current entry selected is marked complete ( next to the line).



Select Messaging.

(also possible: +

The Messages screen containing inbox, outbox, sent and draft will appear. You can receive an e-mail, download an SMS or send e-mail or SMS messages, usually via a mobile phone.

Setup

Confirm all entries with .

Setting up SMS



Pull down the **Setup** menu and select **SMS**.

SMSC

Enter the number of the service centre (see also "SMS setup menu"). Otherwise, the service centre's phone number is used by the telephone.

Validity

This is the time in which the SMSC tries to send the message.



Minutes, hours, days, weeks, user-def., max.

Entering the time period for a time unit.

Leave SMS in Phone: Yes/No

Keep Sent SMS: Yes/No

SMS messages are saved in the IC35.

Transmission confirmation

You receive a message confirming the successful transmission of the SMC. A code must be entered which can be obtained from the network carrier.



+ Saves the settings.

The number of user-defined templates is displayed in the lower part of the screen.

SMS setup menu



Pull down the **Setup** menu and select **SMS**.



Pull down the **Tools** menu.

Server List

You can select the number of the service centre from a preset list. This list must first be loaded from the CD-ROM with IC35 Manager.

SMSC from the mobile phone

Transmission of phone number from a connected telephone.

User-defined Template

You can create autotext entries that can be inserted subsequently as text when sending an SMS message. The number is displayed in the lower part of the screen (see also page 23).

Setting up e-mail



Pull down the **Setup** menu and select **E-Mail**.

1. E-Mail & Network

Addresses

You can set up three e-mail addresses. The current number is displayed in the upper right-hand corner.



Press the left/right key for selection

Enter the following data:

POP 3 server name

POP 3 user name

POP 3 password

SMTP server name

E-mail address

Real name

Add signature: Yes/No

Signature

User name

Password

Phone number

Assigned by server DNS: Yes/No

Primary DNS

Secondary DNS

Input information is available from your Internet provider.



Saves the settings.

2. Modem

Speed

You can choose from six transmission speeds:

1200bps, 2400bps, 4800bps, 9600bps, 14400bps, 19200bps

Dial tone dialling or pulse dialling.

Redial attempts

Selection: 0 to 9

Send initialisation

Selection: Yes / No

Initialisation

Input, e.g.: at



Saves the settings.

3. Filters

You can define filters to regulate the receipt of e-mails.

- (MENU)** Pull down the **Tools** menu.
- Add** Define a new filter. Give the filter a name, select the filter parameters and save the inputs.
- Edit** Modify a filter (see **Add**).
- Delete** The selected filter is deleted.

Move Up/Move Down

Move the user-defined filter in line with the required priority.

- Edit** **Space** Activate/deactivate the filter.

- (FN) + [S]** Saves the settings.

4. Default

The following functions can be activated or deactivated:

Activate Cc

Every recipient can see all copy recipients.

Activate Bcc

These copy recipients are not revealed to the other recipients.

Delete Message at the Server

Copying Outgoing to Sent

- (FN) + [S]** Saves the settings.

5. Read Chip Card Setting

You can also transmit, where applicable, the e-mail settings of a smart card (see also page 6) that was provided by the network carrier.

- Only mobile phones with modem are currently supported for data transfer. For information on selecting a telephone in the list, page 36.
- Ensure that the telephone has an infrared port or is connected via a cable.
- For IrDA (infrared) transmission, the relevant units should be between 5 cm and 35 cm apart. The IrDA windows must face each other and be within line of sight.
- E-mails of up to 4 kbyte are received (4096 characters), No attachments can be sent.

Creating a new message

You can create messages for the three SMS and e-mail communication types. You can access the "Address Book" for an address for this message and the "Note Pad" for text creation.

- (MENU)** Pull down the **File** menu, select **New** followed by **SMS** or **E-Mail**.

Depending on your selection:

- SMS** Enter the phone number of the recipient.
- E-Mail** Enter the e-mail address of the recipient and the reference.

Recipient selection from address list:

- (MENU)** Pull down the **File** menu and select **Tools**.

Supplement the input fields:

You can add **Cc** and **Bcc** fields with **Setup E-Mail** (see page 22).

You can then compose the message text. In the case of SMS messages, you can access your autotexts (see also page 20).

Composer menu

- (MENU)** **Open.**
- File** Save message, save as draft, send, exit.
- Edit** Mark text, copy, cut, paste
- Tools** Enter recipient from "Address Book", recipient of current number, copy data from the note pad, copy the template, display the number of characters (only for e-mail)
- (FN) + [S]** Saves the message.

Message list



Select **Messaging**.

(also possible: **FN** + **5**)

The Message screen containing inbox, outbox, sent and draft and the relevant number of messages (SMS and e-mail) in each appears.

Displaying entries



Select the folder you want.



Open the folder and display the contents.



Select the entry you want.



Display the entry.

Messaging menu

The following functions are possible in the displayed message list:



Open menu and select the required function.

File

New Select a message type.

Open The selected folder is opened.

File filter You can restrict the list display to a specific message type.

Find

You can search the message list by the following criteria:

- Sender
- Date (using calendar)
- Keyword
- Unread

Edit

You can **copy**, **paste**, **delete**, **select**, **mark all messages**.

Connect

You can select which type of messages are to be **Sent and Received**, or **Sent or Received**.

Setup

(see page 20).



Select **Note Pad**.

(also possible: **FN** + **5**)

You can type notes and keep them in a file. It is advisable to give a title to each note file so that you can easily identify it in the list.

Creating a new entry

If Note Pad is empty, a prompt message "Do you want to add a new entry?" appears.



Confirm with **Yes** and create a new entry.

Or



Pull down the **File** menu and select **New**. The input window opens.

Enter the title and then the text of the note.



Saves the note.

If you want to insert the current date in the notes, press the **Tools** menu and select **Date**.

Editing entries

If entries are recorded in **Note Pad**, their titles are displayed. The current category appears in the upper right-hand corner of the status bar.

Displaying entries



Move to the entry required.



Open the input window and display the entry.

Or



Pull down the **File** menu and select **Open**

Editing entries

For more information, see page 15.

Deleting entries

For more information, see page 11.

Searching for entries

For more information, see "Searching by keyword", page 15

Category

For more information, see **Changing a category name** and **Creating a new category** on page 11.

Application

You can copy the selected note pad file under another name (max 8 characters) to an MMCARD.



Select **World Clock**.
(also possible: FN + [6])

The World Clock screen is displayed, showing a world map and two areas with the local city (bold face) and the destination city.

The time displayed for the two cities changes every second. Crossed lines indicate the location of the destination city.



Pull down the **Hour** menu and select the required function:

Time & date



Pull down the **Clock Setup** menu and select **Time & Date**.

Time Enter the hours and minutes.

Date Select the date:



Open the calendar.

Time Format



Select the 12-hour or 24-hour system.

Date Format



DD/MM/YYYY or MM/DD/YY

Daylight Saving



Select whether daylight saving is used at the local or destination location.



Saves the settings.

Daily alarm



Pull down the **Hour** menu and select **Daily Alarm**.

You can set a total of three **daily** alarms.



Switch from one alarm to the other.



Activate/deactivate alarm.



Jump to alarm time and enter this as required.



Saves the settings.

Local

The local time is displayed in conjunction with a city.



Move to the city you want or search for it by entering the initial letters.



When the desired city is displayed, press to set. This city is set as the local city.

Destination

You can set a second city, e.g. a travel destination. Proceed as for **Local Setup**.

Large clock

The map of the world can be replaced by a large clock screen.

To change, proceed as usual, this time selecting **World Clock**.



Select **Calculator**.
(also possible: FN + [7])

The calculator can perform standard 12-digit arithmetic operations such as addition, subtraction, multiplication and division, as well as percentage, square root and memory calculations.

Operators

The operators are printed on the letter keys (see also overview at the start of this user guide)



Addition.



Subtraction.



Multiplication.



Division.



Root.



Percentage.



Shift between minus and plus.



Decimal point.



Show result.

Correcting an entry



Clears the last number entered.



Clears digits one by one.



Clears the last calculation. Correct the last calculation by pressing the right operator key immediately after you make the incorrect entry.

Memory

You can work with numbers stored in memory.



Adds the displayed number to the number already in memory.



Subtracts the displayed number from the number already in memory.



Press once to perform an MR function and recall a number from memory.



Press twice to perform an MC function and clear the number in memory.

Display



The calculator keeps track of operations as it works. The value of each operation is shown in bold face and they are separated by a dotted line.



Scroll through the display.

Calculator menu



You can also use the menu commands to enter operators, perform memory calculations and delete results.



€ Select Converter.
(also possible:  + )

You can make conversions between the Euro, 11 fixed European currencies and three user-defined currencies. The converter palette has two unit labels on the left of the screen for currencies in use and two display panels on the right for their values.

The selected input box appears as a linear display in which you can enter a value to be converted.



Setting the currency unit


  Select one of the two currency boxes on the left.


 /  Scroll to the currency required.

Use the numeric keys to enter the amount. It is automatically converted into the target currency.


Corrections



  Changing from one currency box to another sets the inputs to zero.

 Deletes the input.


 Open the menu and select CE to delete the input.

Changing the rate/ currency

 Open the menu and select Define Rate.


  Select one of the three unassigned positions.



Enter the rate and enter the currency name.

 Concludes the setting. The currency name appears in the display field currently selected.

Viewing the exchange rate list

You can browse through the exchange rates for the fixed European currencies, the Euro and the user-defined currency units from a menu list.

 Open the menu and select List.

  Scroll through the list.

All currencies are based on the EURO and, therefore, do not require adjustment in response to exchange rate fluctuations.

 Open the menu and select File followed by Open.



Opening

First select an application (e.g. Address Book, Schedule, etc.).

File Manager

You can use the File Manager to access all entries/files saved in the unit. The File Manager distinguishes between files that are saved in the unit or on a MMCARD.

 Open the menu and select File followed by File Manager.

  Select one of the storage media:


IC35
MMCard 1
MMCard 2


 Open.


IC35

An overview of the folder with the number of the relevant entries is displayed.

  Select a folder.

 Open the folder.
etc. until the entry is finally displayed.

 Jump back to the original screen.

 Open the menu and

File select followed by:
Open, New Folder, Rename, Close.


Select Edit followed by:
Copy, Paste, Clear, Select, Mark All.

Select Application followed by:
Save to MMCARD

The selected data area on the unit is copied to the MMCARD.

MMCard 1 / MMCARD 2

An overview of the selected MMCARD's folders is displayed. The number of files appears in the ticker line below.

 Open the menu and select File followed by:

Open

A file cannot be displayed unless the associated application is active. The following file types are possible:

*.TXT Composer (max. 4KB)
*.BMP BMP viewer
(max. 239 x 160 pixels)

A warning is issued if the file to be opened has no reference to an application.

If the file/folder to be opened is a backup (see also page 29), IC35 asks you if you want to open the recovery version.

New Folder

You can create a new folder and give it a name (max. 8 characters). On an MMCARD the folder's name can also feature a 3-character suffix (e.g. INFO.TXT).

Rename

You can assign a new name to the currently selected folder. Exception: system-specific folders cannot be renamed.

Format MMCARD

The multimedia card selected is formatted. A note appears.

Confirm with **Yes** to start the formatting.

Finally, you can give the MMCARD a name. If not, the system automatically assigns a name, e.g. CARD 1.

Exit

File edit functions:

Copy, Paste, Clear, Select.

Application**Bmp Viewer (MMCARD only)**

Start an application to view an *.BMP file.

Text Viewer (MMCARD only)

Start an application to view a text file.

Options menu

Select the Options menu to make settings for the IC35 or an MMCARD.



Open the menu and select **File** followed by **File Manager**.



Select one of the three storage media.



Open.



Open the Options menu.

Open

Open the storage medium currently selected.

Format MMCARD

The selected multimedia card is formatted.

MMCARD Status

Status information about a selected multimedia card is displayed.

Rename MMCARD

Give the multimedia card a new name.

Close

Return to the File Manager.

Installing from an MMCARD

You can install applications from the MMCARD. These must first be copied with the IC 35 Manager into the following directory:

VC35\APP

Deinstalling the application

Applications loaded from the MMCARD can be deinstalled from the IC35 memory.

Defragmentation

You can reorganise the memory of your IC35. This function should be implemented at least every 4 weeks, depending on how often the IC35 is used.

When you activate this function, a message appears indicating that the defragmentation operation will take a long time.

Yes/No Start or cancel the function.

 MENU



Open the menu and select **Application** followed by the function required.


Data exchange

The IC35 allows you to transmit data according to the V card and V calendar standards.

Connect the IC35 via the infrared (IrDA) port to another unit and select the function you want to use:

Data transmission

  Select the database that you want to send.

 Enter The send operation is started.

- Of the four databases the Address Book can be sent via V card and Schedule can be sent via V calendar.
- The To Do List and the Note Pad can only be transmitted from one IC35 to another.

Data receipt


Select this function to receive data from another compatible terminal.

IC35 Sync

This function allows you to exchange data between an IC35 and a PC. However this is only necessary if a Sync station is not implemented.

This data can also be transmitted via:


- V.24 serial cable
- IrDA

 MENU Pull down the **Applications** menu and select **IC35 Sync**.

The following options are offered:

IC35 Sync via Cable

IC35 Sync via IrDA

 Enter Select the appropriate option depending on the connection type and confirm.


PC synchronisation is performed. The previous display reappears once the data has been transferred.


 ESC Terminate the function.


See also IC35-Sync, the synchronisation station for the IC35. Original Siemens Accessory.

Phone Manager


You can use the Phone Manager to control the telephone "remotely" and avail yourself of the enhanced display and text input functions of IC35.

 MENU Pull down the **Applications** and select **Phone Manager**.


 Enter Start the connection.

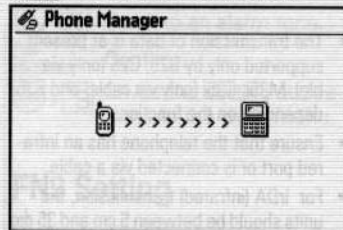

If the above display appears, the connection has been set up.

 Only the functions which refer to the IC35 are described below.

For all other telephone functions please refer to the user guide of your telephone.

 ESC Jump back from all menus and functions.

Info



Phone

Technical information about the connected telephone is shown.

Records

Call

Lists of the calls missed, received and dialled are shown.

  Select the entry you want to call.

 Enter Start the call.

SIM


Technical information about the SIM card of the telephone.

Network

Technical information about the network.

Exit

The telephone manager ends the connection to the telephone.

 MENU Pull down and select the functional area:

Set up

Phone, Network und Diversions are the same as the phone functions.

SMSC on Phone

The number of the service centre that is set in the phone.

IC35 to Phone

Transfer of the service centre number from the IC35 to the telephone.

Phone to IC35

Transfer of the service centre number from the telephone to the IC35.

CB

Functions for using the CB service e.g. **Receive CB**, **Read Broadcast**, **Set CB Topic** and **Topic Index**.

Extras

Bitmap

Upload a graphic to the telephone from an inserted MMC from the directory (1 or 2):

MMCard1\IC35\BITMAP

Delete the loaded graphic.

MIDI

Upload a MIDI file from an inserted MMC from the directory (1 or 2):

MMCard1\IC35\MIDI

Delete the loaded MIDI file.

Organiser

Upload functions allow entries from the IC35 calendar to be loaded into the calendar of the connected telephone.

Download allows the downloading of terminal entries from the telephone to the IC 35 calendar.

Check capacity shows the total number of entries in the telephone.

Terminal

Welcome to IC35 Terminal

Note:

- * Press ENTER to send AT command
- * Press UP and DOWN key to view response
- * Press FN+LEFT to delete a character
- * Press ESC to exit

Press any key ...

- The transmission of data is at present supported only by S25, C25 (only via cable), M35i, C35i (only via cable) and S35i depending on the functions.
- Ensure that the telephone has an infrared port or is connected via a cable.
- For IrDA (infrared) transmission, the units should be between 5 cm and 35 cm apart. The IrDA windows must face each other and be within line of sight.

W@p-Browser

Please refer to the SyncStation user guide for further information about the use of the WAP browser.

MENU

Open the menu and select **Setup** followed by the function required.

This menu is longer than the screen. To display all functions, you must scroll down past the last entry (see also display bars).

Alarm Tone



Scroll to an alarm tone.



Confirm.



Saves the setting and returns to the main menu.

FN9 Setting

Fast selection is activated with the keys (FN) and [g] is freely programmable.



Scroll to the function you want to use.



Confirms your selection and returns to the main menu.

Item Protection

A password must be assigned before you can protect an area (see page 36).

Once the function has been called you are prompted to enter the password.



Confirm input.



Scroll to the area(s) required and ...



... select.



Saves your setting and returns to the main menu.

Language

You can select your language for the display text.



Scroll to the language required and



confirm your selection.



Saves your setting and returns to the main menu.

Miscellaneous

You can change the Buzzer, Battery Type, Key Tones and Decimal Separator settings.



Select the desired item.



Confirm your selection.





Saves the changes and returns to the main menu.

Password

You can restrict access to the system and organiser areas with a password.

Setting the password

- Enter the password, then enter it again to confirm it.
 - Enter a personal question and give a secret answer.
-  +  Saves the setting and returns to the main menu.



- You must remember the **password** and the **secret answer!**
- The password consists of up to eight letters or digits.
- The question and the answer should not exceed 20 characters each.
- You should not start a password with a symbol such as *, / etc.
- For security reasons, all data is deleted if an incorrect PIN is entered three times.




Changing the password



You can change the existing password in the password option. Be sure to enter the correct old password before setting a new one.


Phone Select

Select the phone that is connected (including, where applicable, the connection type).

  Scroll to the phone you want to use and confirm your selection.



   Select connection type IrDA or cable.



 +  Saves the setting and returns to the main menu.

 Open the menu and select **Check** to enable a IC35 search for the connected telephone.



Power Down Time

The auto power down period can be adjusted. If none of the keys is pressed for the specified time, the unit will shut off automatically to conserve energy.

  Scroll to the time required and confirm your selection.

 +  Saves the setting and returns to the main menu.

Power On Procedure



  Scroll to a function and confirm your selection.

Power-on Message

Write a message. This will be displayed briefly on the screen immediately after power-on.

Password



The password is queried after power-on.



 +  Saves the setting and returns to the main menu.



Time & Date

The unit calculates the time of major cities in the world on the basis of the local time.

Enter the current time and date.

  Choose either the 12-hour or 24-hour time format.

  Choose either the Month/Day/Year or Day/Month/Year.

 +  Saves the setting and returns to the main menu.

Press the left/right key in the Daylight Saving field to switch between normal status and daylight saving status.

Startup

Selection of the screen to be displayed after activation:



Main Menu


Messages



Today (Schedule index if an up-to-date one exists).

Restore Last Function

The last function performed before the system is closed down is restored on startup.

  Scroll to the screen required and

 confirm your setting.

 +  Saves the setting and returns to the main menu.

Battery

This function shows you the status of the main batteries and backup battery.

Possible displays:

OK
LOW

Note:

Various functions cannot be executed when the battery capacity is low. A warning is issued when this happens.

Memory

This function shows you the flash memory storage space in percent which is allocated to Organiser Data, Messaging Data and applications such as the WAP browser.

Extension

This function tells you the MMC card or chip card status, where applicable.

About

This function gives you information about the manufacturer and the version number.

IC key

(Information and Communications)

FN + **I** Press keys **simultaneously** to deactivate.

I Press key **briefly** to activate.

I **Hold down** key (if IC35 activated). Activates the messaging input.

The IC key can have additional functions depending on the application open:

I Press key **briefly**.

Function keys

You can activate many functions directly from the main menu using function keys.

FN - Press this key **and** the other combination key **simultaneously**:

FN + 1 Address Book.

FN + 2 Schedule.

FN + 3 To Do List.

FN + 4 Messaging.

FN + 5 Note Pad.

FN + 6 World Clock.

FN + 7 Calculator.

FN + 8 Converter.

FN + 9 Data link (can be changed, see page 35).

FN + 0 Transmit business card (via IrDA).

FN + T Current date and time and current alarms.

FN + N New entry in the list screen in the case of addresses, messages, etc.

FN + S Save, if in input mode in the case of addresses, messages, etc.

For text input:

FN + M Mark text (move the cursor over the characters).

FN + C Copy marked text.

FN + V Insert marked text.

FN + X Delete marked text.

IC menu

I By pressing the IC key you can access a menu containing appropriate functions for the given situation.

Approval

The unit complies with the requirements of the EU directives:

- 89/336/EC "EMC Directive"



Technical data

Supports the following standards:
GSM 07.05, GSM 07.07, WAP (1.1)

Ports:

Smart card (ISO7816),
MultiMediaCard™, V.24 port, IrDA

Weight : 163 g

Dimensions: 108 x 87 x 21 mm
(181 cm)

Main battery : 2 AAA alkaline

Backup battery : CR 1220 lithium

Ambient temp. : 0°C to 45°C

Maintenance tips

- Clean with a damp cloth or an anti-static wipe. Avoid chemical cleaning agents.
- Protect your IC35 from jolts and dampness. Do not expose your telephone to direct sunlight.
- The battery should be removed if your IC35 is out of use for extended periods of time.

Cable IC35 - Siemens Telephones

L36880-N8091-A102

The cable is used to connect the IC35 unit to Siemens mobile phones if these do not have an infrared port (IrDA). Mobile phones with IrDA can use the cable as an alternative to infrared connection.
Cable length: 0.8 m.

Available telephones:

C25, S25, C35i, M35i, S35i

Leather case

L36880-N8091-A101

The elegant leather case offers optimum protection for your Siemens IC35.

The case also features pockets for two backup batteries in addition to MultiMediaCards™ and smart cards.

16 MB Flash MultimediaCard™

L36880-N8091-A104

Flash MultiMediaCards provide additional memory for your IC35 unit.

Sync station

L36880-N8091-A100

Similar to the SyncStation provided by default with IC35. Supports user-friendly operation of IC35 with multiple PCs.

Country	Service Ctr	Tel. No.
Australia	Siemens	1800622414
Austria	Siemens	0517075004
Bangladesh	Siemens	017527447
Belgium	Siemens	078152221
Bulgaria	Omnitel	02739488
China	Siemens	02150318149
Croatia	Siemens	016105381
Czech Republic	Siemens	0233032727
Denmark	Siemens	35258600
Finland	Siemens	0922943700
France	Siemens	0156384200
Germany	Siemens	01805333227
Greece	Siemens	016864389
Hong Kong	Siemens	22583636
Hungary	Siemens	0614712444
Indonesia	Dian Graha Elektr.	0214615081
Ireland	Siemens	1850777277
Italy	Siemens	0269893691

Country	Service Ctr	Tel. No.
Luxembourg	Siemens	43843399
Malaysia	Hello Service	032415993
Netherlands	Siemens	0703333100
Norway	Siemens	22633314
Pakistan	Siemens	0215673565
Poland	Siemens	0800220990
Portugal	Siemens	014178393
Russia	Siemens	80957371801
Singapore	Siemens	8454818
Slovak Republic	Siemens	0759682266
Slovenia	Siemens	0611746333
South Africa	Siemens	0800114050
Spain	Siemens	902115061
Sweden	Siemens	087509911
Switzerland	Siemens	012120090
Taiwan	Siemens	0225186504
Thailand	Siemens	26791777
Turkey	SIMKO	02122528835
United Kingdom	Siemens	0990334411

Service C#	Country
001	Algeria
002	Algeria
003	Algeria
004	Algeria
005	Algeria
006	Algeria
007	Algeria
008	Algeria
009	Algeria
010	Algeria
011	Algeria
012	Algeria
013	Algeria
014	Algeria
015	Algeria
016	Algeria
017	Algeria
018	Algeria
019	Algeria
020	Algeria
021	Algeria
022	Algeria
023	Algeria
024	Algeria
025	Algeria
026	Algeria
027	Algeria
028	Algeria
029	Algeria
030	Algeria
031	Algeria
032	Algeria
033	Algeria
034	Algeria
035	Algeria
036	Algeria
037	Algeria
038	Algeria
039	Algeria
040	Algeria
041	Algeria
042	Algeria
043	Algeria
044	Algeria
045	Algeria
046	Algeria
047	Algeria
048	Algeria
049	Algeria
050	Algeria
051	Algeria
052	Algeria
053	Algeria
054	Algeria
055	Algeria
056	Algeria
057	Algeria
058	Algeria
059	Algeria
060	Algeria
061	Algeria
062	Algeria
063	Algeria
064	Algeria
065	Algeria
066	Algeria
067	Algeria
068	Algeria
069	Algeria
070	Algeria
071	Algeria
072	Algeria
073	Algeria
074	Algeria
075	Algeria
076	Algeria
077	Algeria
078	Algeria
079	Algeria
080	Algeria
081	Algeria
082	Algeria
083	Algeria
084	Algeria
085	Algeria
086	Algeria
087	Algeria
088	Algeria
089	Algeria
090	Algeria
091	Algeria
092	Algeria
093	Algeria
094	Algeria
095	Algeria
096	Algeria
097	Algeria
098	Algeria
099	Algeria
100	Algeria

Smart battery 7 AA-V rechargeable

Backup battery CR 1220 lithium

Ambient temp. 0°C to 45°C

Maintenance tips

• Clean with a damp cloth or an anti-static wipe. Avoid chemical cleaners.

• Remove your IC35 from jobs and computers. Do not engage your switch on a power saw/light.

• The IC35 should be removed if you are using a power saw/light.

Service C#	Country
001	Algeria
002	Algeria
003	Algeria
004	Algeria
005	Algeria
006	Algeria
007	Algeria
008	Algeria
009	Algeria
010	Algeria
011	Algeria
012	Algeria
013	Algeria
014	Algeria
015	Algeria
016	Algeria
017	Algeria
018	Algeria
019	Algeria
020	Algeria
021	Algeria
022	Algeria
023	Algeria
024	Algeria
025	Algeria
026	Algeria
027	Algeria
028	Algeria
029	Algeria
030	Algeria
031	Algeria
032	Algeria
033	Algeria
034	Algeria
035	Algeria
036	Algeria
037	Algeria
038	Algeria
039	Algeria
040	Algeria
041	Algeria
042	Algeria
043	Algeria
044	Algeria
045	Algeria
046	Algeria
047	Algeria
048	Algeria
049	Algeria
050	Algeria
051	Algeria
052	Algeria
053	Algeria
054	Algeria
055	Algeria
056	Algeria
057	Algeria
058	Algeria
059	Algeria
060	Algeria
061	Algeria
062	Algeria
063	Algeria
064	Algeria
065	Algeria
066	Algeria
067	Algeria
068	Algeria
069	Algeria
070	Algeria
071	Algeria
072	Algeria
073	Algeria
074	Algeria
075	Algeria
076	Algeria
077	Algeria
078	Algeria
079	Algeria
080	Algeria
081	Algeria
082	Algeria
083	Algeria
084	Algeria
085	Algeria
086	Algeria
087	Algeria
088	Algeria
089	Algeria
090	Algeria
091	Algeria
092	Algeria
093	Algeria
094	Algeria
095	Algeria
096	Algeria
097	Algeria
098	Algeria
099	Algeria
100	Algeria

cards

16 MB Flash MultimediaCard™

L16880-N0001-A104

Flash MultimediaCards provide additional memory for your IC35 unit.

Synchronization

L16880-N0001-A100

Similar to the SyncStation provided by default with IC35. Supports user-friendly operation of IC35 with multi-pc PCs.

- A**
- Activating 8
 - Address Book
 - category assignment 11
 - deleting entries 11
 - searching by sequence 10
 - sorting entries 10
 - transmitting via infrared 12
 - Address book
 - deleting entries 11
 - Alarm tone 35
 - Application manager 31
 - Approval 40
- B**
- Batteries 5
 - Battery status 38
 - Battery type 35
 - Bcc 22
 - Bitmap upload 34
 - Bmp Viewer 30
 - Button cell 5
 - Buzzer 35
- C**
- Calculator 27
 - Calendar 14
 - Cc 22
 - Chip card 6
 - Completion status 18
 - Contrast setting 7
 - Converter 28
 - Currency name 28
 - Currency unit, setting 28
 - Current time 26
- D**
- Daily schedule 14
 - Data Link 32
 - Data receipt 32
 - Data transmission 32
 - Date format 26
 - Daylight saving time 26
 - Decimal separator 35
 - Defragmentation 31
 - DNS 21
- E**
- Editing the category 11
 - E-mail & network 21
 - EURO 28
 - Exchange rate list, viewing 28
 - Extension 38
- F**
- File Manager 29
 - Filter 22
 - Find field 10
 - Flash alarm 14
 - FN9 setting 35
 - Function keys 39
- I**
- IC key 39
 - IC35 manager 40
 - Infrared 7
 - Infrared port 12, 22, 34
 - Infrared window 7
 - Initialisation 21
 - IrDA 7, 32
 - Item protection 35
- K**
- Key tones 35
- L**
- Language 35
 - Large clock 27
 - Local city 26

M	S
Maintenance tips 40	Schedule 14
Memory 38	Schedule entry 14
Messaging 20, 21	Search field 10
creating a new message 23	Secret answer 36
list menu 24	Server list 20
message list 24	Setting the destination 26
setting up e-mail 21	Smart card 6
setting up SMS 20	SMSC 20
MIDI upload 34	SMSC on phone 33
MMCard	Special functions 39
formatting 30	Startup display setting 37
inserting 6	T
status 30	Technical data 40
Modem 21	Telephone Manager 33
Multimedia card 6	Terminal 34
N	Text Viewer 30
New category 11	Ticker line 8
Note Pad 25	Time & date 37
O	Time format 26
Operators 27	Time, setting 26
Organiser upload 34	To Do
P	priority 17
Password 36	To Do List 17
PC interface 7	note 17
PC synchronisation 32	priority 18
Phone select 36	Tone dialling 21
Phone to IC35 33	Transmitting business cards 12
POP 3 21	V
Power down time 36	V.24 serial cable 32
Power on setting 37	W
Pulse dialling 21	W@p-Browser 34
R	World Clock 26
Red phonebook 13	

SIEMENS

SyncStation User Guide

English



Table of Contents

Sync Station

User Guide	1
IC35 Sync	4
Software installation	4
Connection between PC and IC35 via SyncStation	4
Starting the IC35 Sync software	5
IC35 Sync	6
Additional connection options between PC and IC35	6

WAP

User Guide	7
Starting/exiting the browser	8
Connecting to the phone	8
Starting	8
Connecting	8
Ending a connection	8
Exiting	8
Configuring the Service Provider	9
Profiles	9
Creating profiles	9
Navigating in WAP pages	11
Window structure	11
Links	11
Texts/graphics	11
Footer	11
Input fields	11
Menu	12
Browser	12
Navigate	12
History	13
Bookmarks	13
? (Software version)	13
Appendix	14
Quick selection and key combinations	14
Index	15

IC35 Sync software

The IC35 Sync software is a desktop program for the user-friendly synchronisation of your IC35 data with MS Outlook and Lotus Organizer. This software ensures that the same up-to-date data is always available on both your IC35 and your PC applications.

Operation is very easy. All it takes is a mouse click to import, export and synchronise data.

Software installation

The installation software can be found on the CD-ROM supplied. To install the IC35 Sync software, double-click the file:

Setup.exe

Then follow the instructions issued by the installation program.

Connection between PC and IC35 via SyncStation


Connecting SyncStation to PC

Connect the SyncStation cable at the PC to a COM port (COM 1 to COM 4).

Make sure that the station is placed on a non-slip surface.

Connection between IC35 and SyncStation

Slide back the panel in front of the port on IC35 before plugging in the cable. Insert the IC35 in SyncStation.

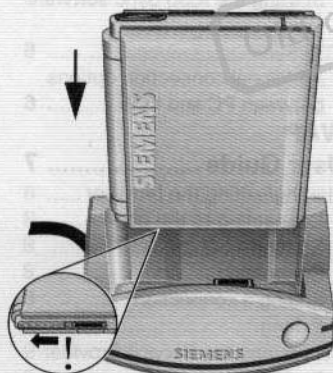

Initialise SyncStation by pressing the button on the front of the SyncStation. A green LED lights up on the IC35 when initialisation is successful.


Data can also be exchanged between the IC35 and the PC without SyncStation. To do this, see "Additional connection options between PC and IC35", page 6.

Starting the IC35 Sync software

If a connection has been set up between the IC35 and the PC, double-click the IC35 Sync icon on the Windows desktop and start the software:



The following options appear:

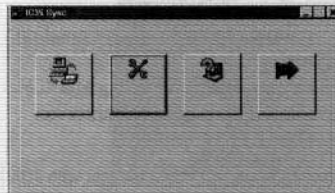

Configuration

Click the Configuration icon.



A window containing four areas opens. These areas can be activated with a mouse click for the purpose of data exchange. An active area is indicated by a tick.

Options

You can select the PC program that you want to use on your PC in the "Options" window. You decide whether data is to be imported, exported or synchronised.

Assignment of options:

SIEMENS IC35	MS Outlook	Lotus Organizer
Schedule	Calendar	Calendar
Address Book	Contacts	Contacts
Note Pad	Warnings	Note Pad
To Do List	Tasks	To Do List

Lotus Organizer and MS Outlook are registered trademarks.

Communication

- Set the communication methods used: SyncStation, IrDA (IrDA connection, siehe Seite 6)
- Select the port used (COM1 to COM4).

Advanced settings

You can mark the following setting here.

Confirmations:

A prompt should appear before modifications and deletion of records. Both are recommended.

Conflicts:

Instructions as to how to deal with problems when conflicts arise in the case of data modifications between IC35 and MS Outlook or Lotus Organizer.

Help



The help function is available should you encounter problems. This function provides you with a list of various help topics.

Synchronisation



Start the synchronisation operation once all settings have been correctly made. Data exchange animation indicates that the operation is in progress.

Close






Exit IC35 Sync.

Do not forget to remove the IC35 from SyncStation when synchronisation has been successfully completed. Otherwise the batteries of your IC35 will be depleted.

Additional connection options between PC and IC35

Connection via infrared port (IrDA)

Switch on the IC35.

-  Press and select **Applications** followed by **IC35-Sync**.
-  Select **IC35 synchronisation via IrDA**.
-  Confirm.

A window entitled "Synchronisation" appears.

The **IC35 synchronisation via IrDA** window reappears once synchronisation has been completed.

The prerequisite for data transfer with IrDA is a PC or laptop with an operational IrDA port (SIR standard).

For transmission via IrDA, the distance between the units should be between 5 cm and 35 cm.

When synchronising, the transmission speed via IrDA is 19.2 kbps

SIEMENS

WAP User Guide

English




Starting/exiting the browser

Connecting to the phone

There are two methods of connecting IC35 to a mobile phone:

- Via a cable supplied as an accessory to IC35.
(see also the chapter on accessories in the IC 35 user guide)
- Via an IrDA interface. The IrDA interface must be switched on at the mobile phone.


First select your mobile phone model in the IC35:


 Select the **Settings** menu item

Telephone type Select.

For more information on the configuration and use of these interfaces, refer to the user guides provided with your mobile phone and IC35.


Starting

 Select the **Application** menu item.

W@p Browser Select.
 Confirm.

Connecting

Before setting up a connection you should select a service provider (Profiles) for access to the WAP:


 Select the **Browser** menu item.

Profiles Select.


The profile currently active is identi-

fied by an *. To activate another profile, select it and confirm with OK. (siehe auch "Creating profiles" auf Seite 9)

To set up a connection:


 Select the **Browser** menu item.

Connect Select.

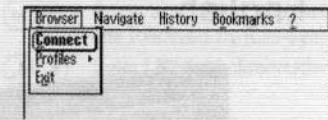

Ending a connection


To clear down an existing connection:

 Select the **Browser** menu item.

End connection select.

or press:  + C

Exiting

 Select the **Browser** menu item.

Exit Select.

or press:  + X.


Configuring the Service Provider

Profiles

A profile contains access information and configurations of the service provider. IC35 allows you to save three profiles simultaneously, one of which is active. For more information please refer to your service provider.

You can also find more information under:
<http://www.siemens.com/ic35>.


Creating profiles

 Select the **Browser** menu item.

Profiles Select.

 Press.

You can select one of the three profiles in the following submenu.

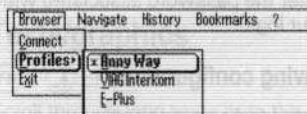

 Press.

The configuration menu opens.

Configuring a profile

The following settings can be made in the configuration.

Name of slot

Enter a name for the profile you defined. This name will appear in the profile selection box and during the connection.

Start page

Enter the URL of the page you want to use as the start page. This page is always opened as soon as you set up a connection or select the **start page** menu item.



Modem init string

Special AT commands for initialising your mobile phone can be entered here.

Bearer type


You can choose between two types **CSD** (Circuit Switched Data) and **SMS** (Short Message Services).

Select the field bearer type:



 or .


configuration 1

name of slot: Annay Way
bearer type: **CSD**
start page: <http://wap.annayway.com>
modem init string:
OK Cancel

 Press. **CSD** and **SMS** appear.

Make your selection with:

 or .

 Confirm selection.

2 x  Press.

The configuration menu for **CSD** or **SMS** opens.

CSD configuration


The CSD bearer type is more widespread than SMS. If in doubt, consult your service provider.

csd settings:

IP of WAP gateway: 139.2.72.21
port number: 8200
number to dial: ATDT004823155581
session type: temporary
login: armyway
password: *****

Cancel

Make your selection with:



IP of WAP gateway

IP address of the desired gateway.

Port number

The port number can be changed here (subject to explicit instructions by access provider).

Number to dial

Number (with prefix) of your access provider. This includes the modem control sequence ATDT (see also diagram above).

Session type

There are four session or connection types to choose from.

Enter the connection type required by the service provider.

session type:

- temporary
 continuous
 temporary secure
 continuous secure

Cancel

Login


Enter the user ID (login) provided by your service provider.

Password

Enter the password associated with your login.

Saving configuration


Make your selection with:



Confirm. The last profile configured is active.

Window structure

This is the actual browser field which contains links, texts, graphics, selection boxes and/or input fields.

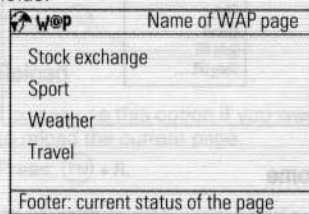

Links



Navigate through the WAP page links provided.



Select the **marked** link.

Texts/graphics




Scroll through long texts or to the next page.

Footer



This key combination brings you to the footer menu items or returns you to the browser window. You can change the menu items with the arrow keys. If an arrow pointing upwards appears in the lower right-hand corner of the footer, additional menu items that could not be ac-

commodated in the footer are displayed under **Navigate** in the header.

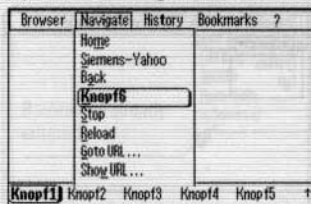

Input fields

Text input field

You can use the text input field to enter a security identification code for example.



Press to select.

Make an entry in the new window.



Confirm an input in a field.

Depending on the WML text, some input fields may not be left blank. In this case, press ...



... to cancel.

Selection box

There are selection boxes for single and multiple selection.



To open a selection box, select the square brackets.




Space

Make your selection.



Confirm.

Browser

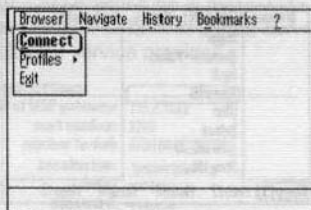

Connect/End connection

You can use this option to set up or clear down connections.

Press: **(FN) + C**.

Profiles


This function is used to configure profiles (siehe Seite 9).

Exit

Select this option to exit the browser.

Press: **(FN) + X**.

Navigate

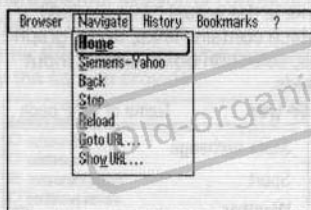

Home

The Home menu item allows you to revert from the current page to the start page defined in the profile.

Press: **(FN) + H**.

Siemens-Yahoo

This menu item automatically opens the Yahoo service pages.

Press: **(FN) + Y**.

Back

Back enables you to reload the previous WAP pages without having to re-enter the URL. This option is only available for up to 10 pages.

Press: **(FN) + (Left Arrow)**.

Stop

This option allows you to stop loading a new page. You remain on the page where you initiated the load operation.

Press: **(ESC)**.

Reload

You can use this option if you want to reload the current page.

Press: **(FN) + R**.

Show URL...

Shows the WAP address of the current page.

Press: **(FN) + U**.

Goto URL...


You can select WAP pages directly. Enter the desired address only. The browser automatically inserts the prefix HTTP://.

Press: **(FN) + L**.

History

The history contains a list of the WAP addresses of the last 10 pages loaded. These pages can be reloaded directly from this list.

Bookmarks

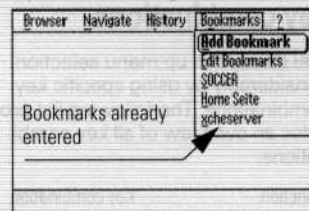

Bookmarks save a WAP address under a short name which can be accessed later. Short names can contain up to 13 characters.

Add Bookmark

This option can be used to set bookmarks in which the last page loaded will be saved. Bookmarks can also be edited later and assigned to another WAP address.

Press: **(FN) + D**.

Edit Bookmarks

This function allows you to edit bookmarks. They can be renamed, deleted or modified.




Press: **(FN) + B**.

? (Software version)

Indicates the version number of the program.

Quick selection and key combinations

You can speed up menu selection considerably by using specific key combinations. The following list provides an overview of all key combinations:

Function	Key combination
Reload	FN + R
Exit	FN + X
Footer	FN + 
Goto URL...	FN + L
Edit Bookmarks	FN + D
Add Bookmark	FN + B
Page up	FN + 
Page down	FN + 
Siemens-Yahoo	FN + Y
Home	FN + H
Stop	ESC
Connect	FN + C
End connection	FN + C
Show URL...	FN + U
Back	FN + 